

TX-7070W48FSB3-NU3CH-01

PRODUCT SPECIFICATION

Features:



Chip Material:

Emitting Color:

Applications:

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|

Package Dimensions:

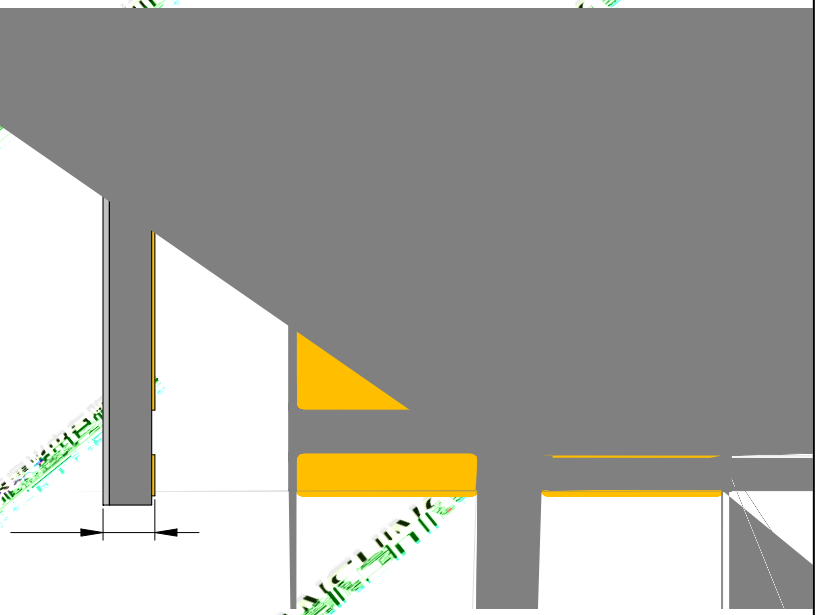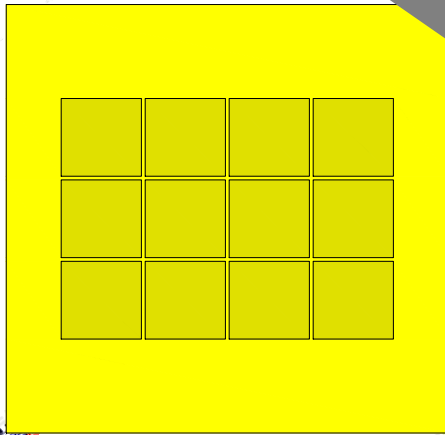

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|

Absolute Maximum Ratings (Tc=25)

| Parameter | Symbol | Ratings | Unit |
|-----------|--------|---------|------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Notes:


| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|



Usage Precautions

Storage Environment Condition

Soldering Condition

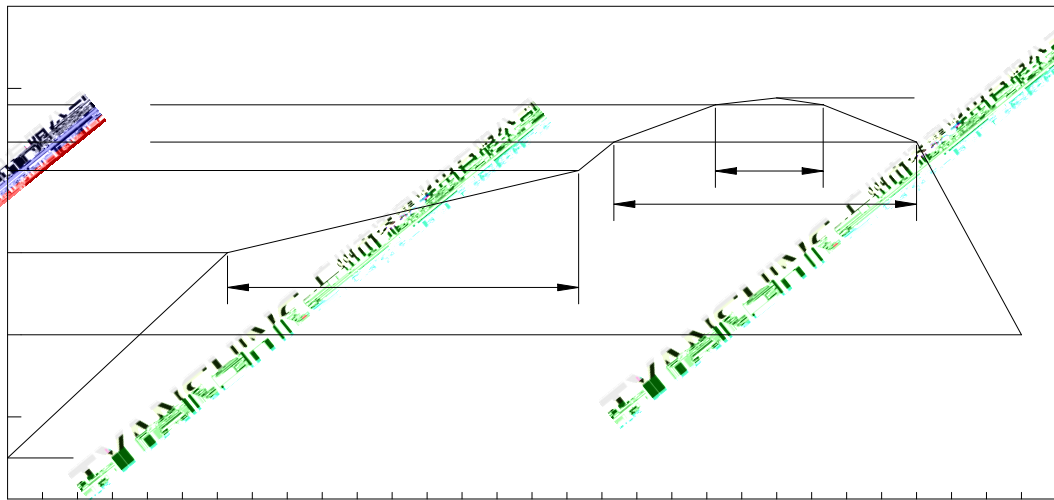


| Profil-Charakteristik Profile Feature | Symbol | Pb-Free(SnAgCu)Assembly | | | Einheit Unit |
|--|--------|-------------------------|----------------|---------|-----------------|
| | | Minimum | Recommendation | Maximum | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Note:

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|

Dimensions For Cannulation And Packaging

Quantity: 1000PCS

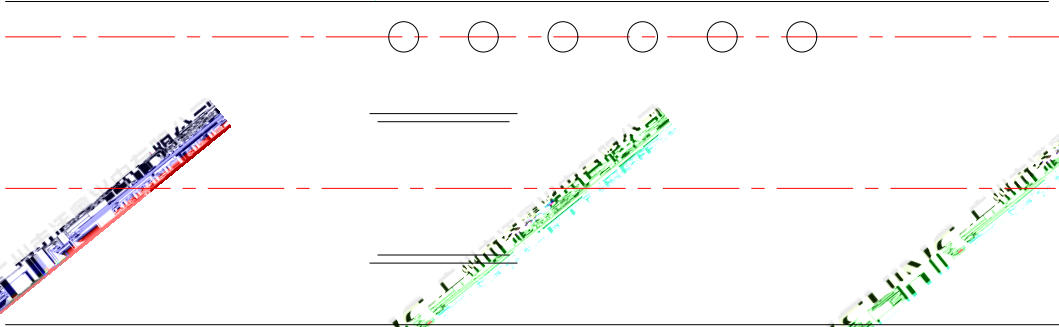

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|